



Smart Water Leak Sensor

User Manual



Please read this manual carefully before use and keep it for future reference.

Specifications

Battery type: LR03 1.5V / AAA ×2

Static current: ≤ 5uA

Alarm current: ≤ 150mA

Low-Voltage indication: ≤ 2.4V

WiFi: 802.11 b/g/n

Installation: Wall-mounted


Detection: Water-sensor detector

Working Temperature: -10°C ~ +50°C


Working Humidity: 95% RH

How to use

Push the mounting bracket upward and take out the bracket, then insert the battery.



Put the battery into the battery bin and place it according to the graphics in the battery bin. After two batteries are loaded, the indicator lights are always on and then off.

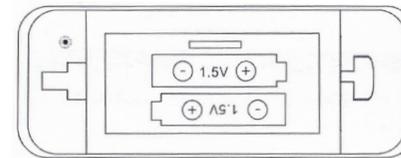

Download & Install the APP

1. Go to your App Store & search the "Smart Life" & install the app.
2. Input account name and password to login. If you don't have an account, please register an account first. System will identify your country automatically. You can use your mobile phone number as your account name.
3. Tap on "Next" to get a verification code via SMS on your mobile phone. Enter a desired password.
4. Tap on "Confirm" to finish your registration.

Register with email, click "My Home" interface "+" or click "Add Devices" in the middle blank. Select "Sensor" and then press "Flood Detector Wi-Fi".

Enter the WiFi password according to the prompt and click to confirm.

Press the button of water sensor and then the LED indicator will flash rapidly, then will come to the automatic network connection mode.

After connecting network successfully, the APP will remind "water leak alarm" or "normal" when water sensor detect "water" or "no water".

