



Smart Vibration Sensor

User Manual



Please read this manual carefully before use and keep it for future reference.

Product Specifications


- Working voltage: DC 3V
- Standby current: ≤10uA
- Alarm current: ≤20mA
- Communication: WiFi2.4G/Zigbee 3.0
- Transmission distance: 10~30 meters (no obstruction indoor)
- LED indicator: yes
- Installation: Double-side tape
- Battery: 2*1.5V AAA LR03
- Working temperature: -10°C~50°C
- Working humidity: ≤95%(no condensation)

Packing List

- Vibration sensor X1
- User manual X1
- Double-side tape X1

Product Description

The Vibration sensor need connect to the Smart Life APP to use (Zigbee version need to add a Zigbee gateway). When the device status changes, such as vibration, hit, drop etc, mobile app all will receive alert notification. It also can work with another smart device for home automation.

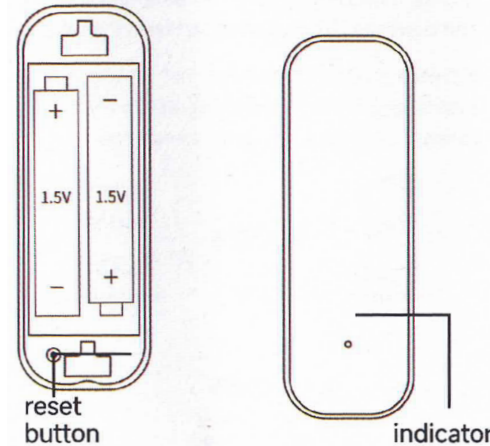

Preparation For Use


Smart Life APP

Before device binding operation, please install Smart Life APP on your phone and register account via email address. The App can be download by scanning QR code or from Google Play or App store.

[Smart Life] APP



Ensure that your phone is connected with local WIFI 2.4GHz Network and Bluetooth is enabled.

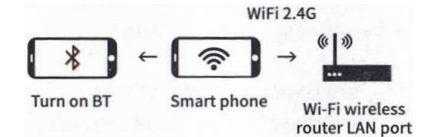

Push the bottom case down, then take out and install the battery.

For further steps, please choose description corresponding to version of your product

- Wi-Fi** WI-FI version (binding direct with router)
- zigbee** Zigbee version (binding with Zigbee gateway)

WI-FI Version


- On the APP main page, click the "+" in the upper right corner, select "Add Device".
- Press and hold the "RESET" button of the sensor for 5s until the indicator flashes.
- APP will search device via bluetooth, after show "discovering devices....", press "Add".
- Enter correct password of WIFI then press "Next", the device will automatically connect to the network.

Zigbee Version

Note: Before device binding operation, please make sure that the Zigbee gateway is binded to APP.


- Enter into the Zigbee Gateway page, click "Add subdevice".
- Press and hold the "RESET" button of the sensor for 5s until the indicator flashes.
- Click "LED already blink" for adding device, and done binding according to the APP prompts.

If Zigbee gateway "search device" time more than 2 mins, will exit from matching. We can exit the gateway and enter into again to operate.

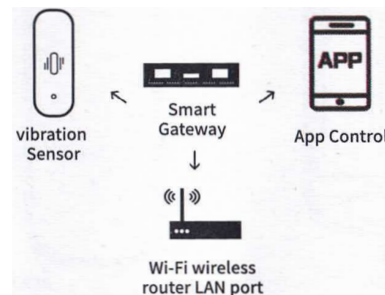

Installation

- Choose a suitable place for installation.
- Fix with double-side tape.

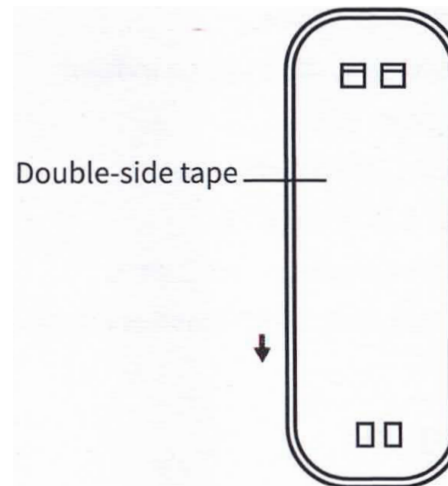

Contact Information

Ledgebit Technologies Private Limited,
401, Vipul Trade Center, Sec 48,
Gurugram, Haryana 122018

www.ledgebit.com

sales@ledgebit.com

+91-9810320256